

**LIFT VANDALISM PROTECTION SYSTEM – MSLVP001**

*Wiegand & RS232 Dual Interface  
Elevator with CCTV and Card Access*



Items	Specs
Input (V)	23V – 27V
Humidity	0 – 95 % (Non- Condensing)
Operating Temperature	0 - 40°C
No. of Reader	1
No. of Cards	2000 (Expandable)
Reader Format	RS232, Wiegand, RS485
Indicators	LCDs, Speaker, LEDs
No. of Cameras	Up to 16 Cameras / system
Picture Frame	25 / Sec
Camera Settings	Independent


Note: The Specifications above are subject to change without prior notice

***Elevator***

Protect your lifts from misuse and tampering using the Lift Vandalism Protection System. This integrated security and surveillance system consists of an Elevator Card Access Control (Manual or Automatic Floor selection) & a CCTV.

The Card Access Control allows only the authorized persons to operate the lifts while the CCTV will provide real time monitoring; protecting people or property by identifying perpetrators, preventing accident.

***Elevator Access Controller***

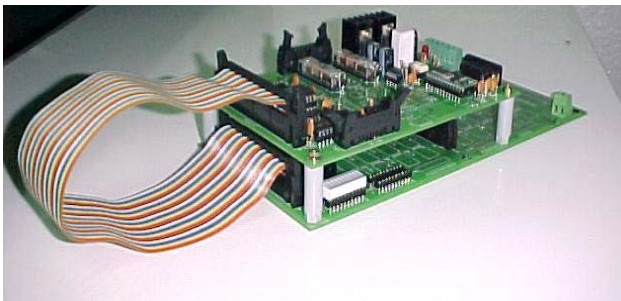
















***Reader***



**Features:**








***Card Access***

-  Integrated High End Security System for Elevator
-  Prevent the abuse of Elevator usage
-  User-friendly Access Card
-  LCD display for Visual User Interaction
-  Speech Module for User Audio Interaction
-  Customizable Visual and Audio Messages\*
-  Storage of Maximum 2000 Cards
-  User Programmable Card \*\*
-  Automatic Floor Selection

-  Customizable Card Photo Badging\*
-  Automatic Floor Selection
-  Fail Safe Operation during EAC Malfunction
-  Fireman Operation during Fire
-  EAC-UIS User Interface Software for User-friendly Card Management
-  Mobile User Interface Kit (MUIK) for Card Programming

**Features:**

**CCTV**

-  Recording speed is up to 25 frames per second
-  Motion Detection Record settings
-  Supports multiple types of Camera such as PTZ, Night Dome Camera, Colour Camera
-  DVMS allows playback of recorded videos
-  Up to 16 Cameras per system
-  Independent Camera Settings
-  DVMS facilitates the viewing of Live video from a Remote Location



**Typical Monitor Screen for CCTVs**

Application:

This product is suitable for numerous applications, such as

- ❖ Elevator Monitoring
- ❖ Automatic / Manual Floor Access Control.
- ❖ Elevator usage Control.